


**GIRDER ELEVATION
MID-SEGMENT**

* OMIT HOLES AND PLACE INSERTS ON THE INTERIOR FACE OF EXTERIOR GIRDERS. PLACE HOLES AND INSERTS PARALLEL TO SKEW. INSERTS SHALL BE 1"Ø MEADOWBURKE MX-3 HI-TENSILE, 1"Ø MEADOWBURKE FX-19 FERRULE INSERT, 1"Ø x 5/8" WILLIAMS F22 OPEN FERRULE INSERT, 1"Ø x 4 9/16" DAYTON-SUPERIOR F-62 FLARED THIN SLAB FERRULE INSERT OR APPROVED EQUAL. (TYP.) *

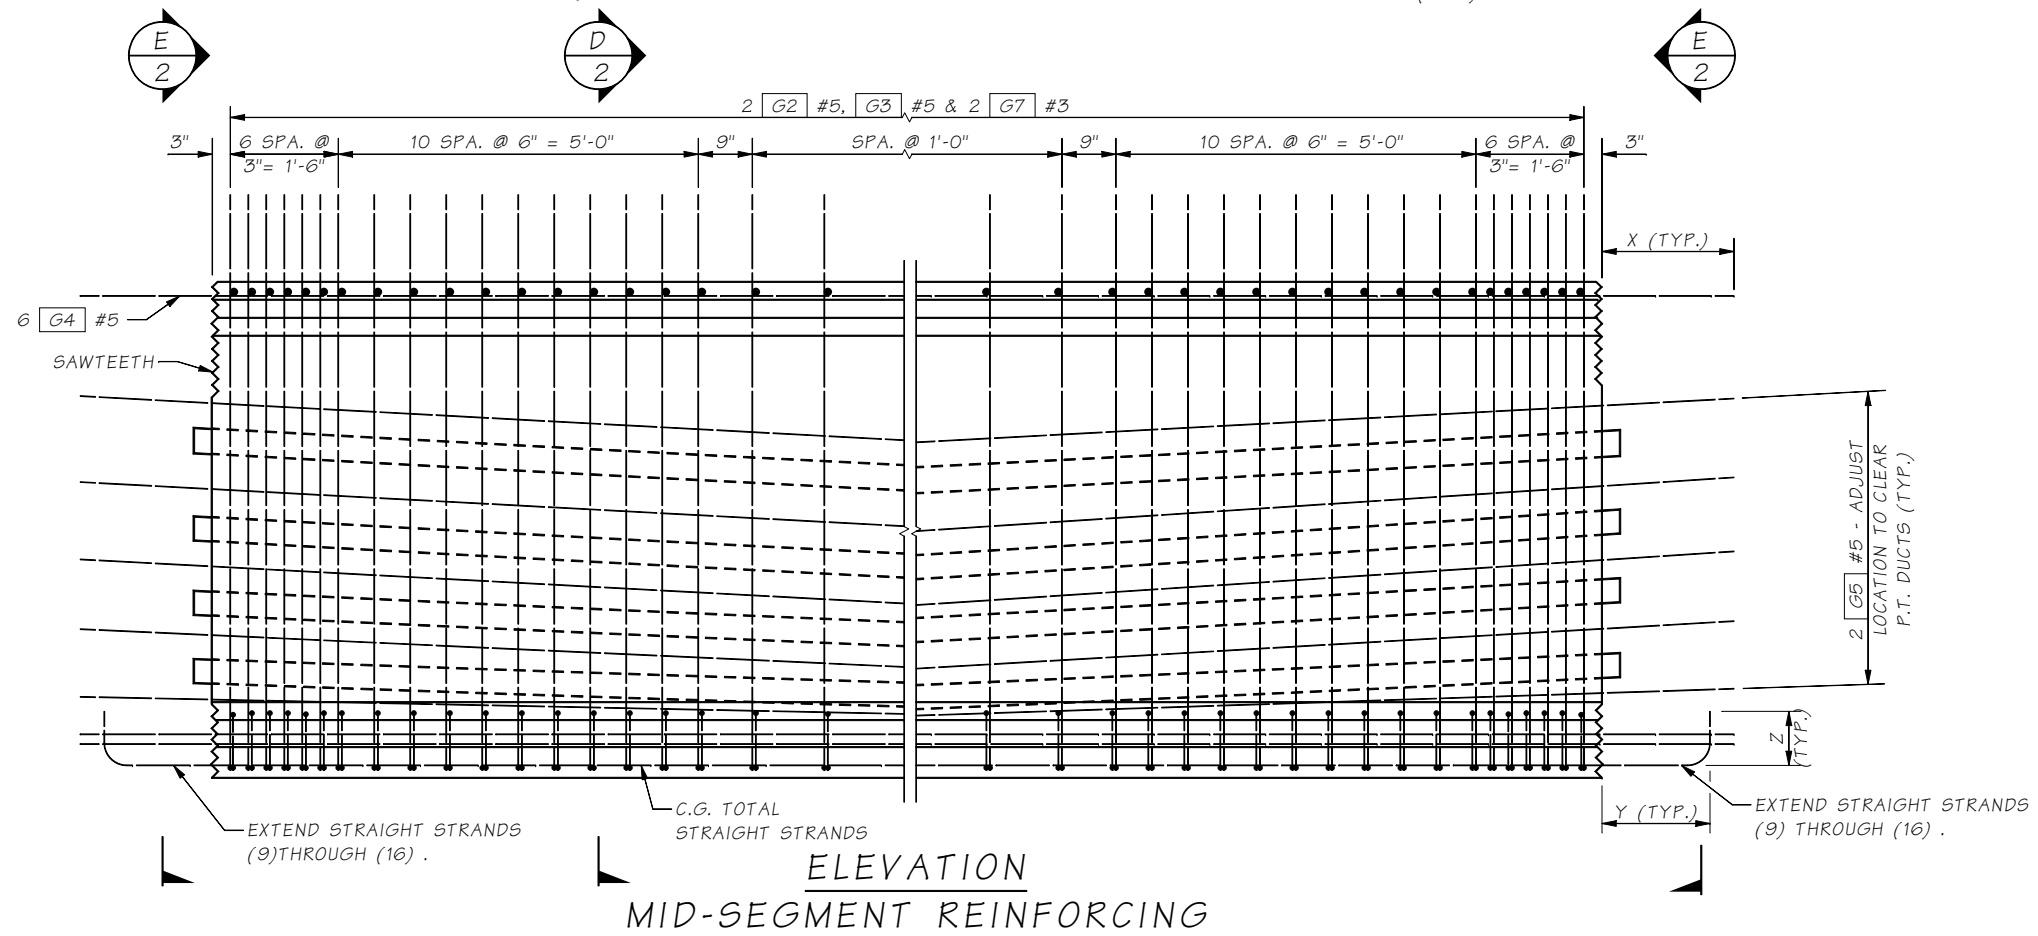

**ELEVATION
MID-SEGMENT REINFORCING**

Last revised: 5/23/16

SHEET

JOB NO. 5.9-A2-4

Bridge Design Engr.	M:\STANDARDS\Girders\PT Wide Flange\WF83PTG4.MAN				REGION NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
Supervisor					10	WASH.			
Designed By					JOB NUMBER				
Checked By									
Detailed By									
Bridge Projects Engr.									
Prelim. Plan By									
Architect/Specialist	DATE	REVISION	BY	APPD					

**BRIDGE
AND
STRUCTURES
OFFICE**



**STANDARD
PRESTRESSED CONCRETE GIRDERS**

WF83PTG SPLICED GIRDER
DETAILS 4 OF 5

BRIDGE SHEET NO.
SHEET
OF
SHEETS